

HUBER Reja de gruesos RakeMax® CF



The innovative variant of the well-proven RakeMax® screen

- High hydraulic throughput capacity even with small bar spacings and narrow channels due to a U-shaped bar rack
- Optimal hydraulic utilisation of existing channels
- Unsusceptible to grit, gravel and stones

The HUBER Multi-Rake Bar Screen RakeMax® CF is perfectly suited to serve both municipal or industrial wastewater, and process water screening.

The HUBER RakeMax® CF consists of a U-shaped stationary bar rack installed between the two screen frames, parallel to the flow direction of the wastewater.

Whilst the wastewater flows into the open front side of the screen and out through both the left and right bar rack, solids are retained on the inner surface of the U-shaped bar rack.

The solids retained on the bar rack lead to gradual blinding of the bar rack surface which has an impact on the level difference in the channel. Cleaning of the screen bars starts at a defined water level in the channel upstream of the screen. The RakeMax® CF achieves this with its cleaning elements attached to the chain system.

The discharge capacity can be adjusted to individual requirements as the number of screening elements attached to the chain system is variable.

Due to the specific design of the RakeMax® CF screen its height above floor is very low and, even in case of deep channels, only dependent on the installation height of the downstream screenings transport or washing system.

If the screen operation is blocked, an electric control reliably protects the screen against damage caused by overload.

At the end of the bar rack cleaning cycle the rake is positively cleaned by a pivoted comb which reliably discharges the removed screenings into a downstream transport or disposal unit. The easy to access and maintain drive unit is installed above the channel.

Due to its different design options the RakeMax® CF covers a very wide range of applications, allowing us to respond to the individual needs of our customers and to specific constructional and hydraulic site conditions. Screen sizes may vary from a channel width from 1 - 3 metres, a discharge height above channel floor up to 20 metres and bar spacings from 4 - 50 mm.

Ventajas

THE BENEFITS OF THE HUBER MULTI-RAKE BAR SCREEN RAKEMAX® CF AT A GLANCE:

- High hydraulic throughput capacity even with small bar spacings and narrow channels due to a U-shaped bar rack
- Optimal hydraulic utilisation of existing channels
- Very low headloss – high separation efficiency
- Defined meshing of the cleaning rakes with the bar rack ensures a high operating reliability.
- Screen installation possible without a bottom step
- Compact design with a low installation height above ground level
- Completely odour-encased screen with easy to remove covers
- Easy-to-retrofit into existing channels, installation without channel recesses possible
- The screen is a sturdy self-supporting stainless steel construction and therefore can easily be lifted out of the channel.
- Not hindered by gravel or grit
- Simple and easy-to-access chain tensioning unit
- All machine components in contact with the medium are made of stainless steel and acid treated in a pickling bath (except chains, pinions, drives and bearings). The chains and chain wheels are optionally available in stainless steel.
- High screenings discharge capacity through a variable number of screen rakes
- Automatic scraper mechanism, no service water required
- Optional integrated emergency overflow


Downloads

 [Folleto: HUBER Multi-Rake Bar Screen RakeMax® CF \(Inglés\)](#) [pdf, 302 KB]


Casos prácticos

- Desde el edificio colector hasta el secado de lodo residual: Modernización completa de la planta de tratamiento de aguas residuales de La Crosse con HUBER
- La reja de gruesos HUBER RakeMax®: una historia de éxito con más de 3.000 máquinas instaladas
- Reja de desbaste RakeMax® CF de HUBER: Un innovador sistema de rejillas que convence al usarlo
- HUBER combina la contrastada RakeMax® con las rejillas Center Flow
- El HUBER RakeMax® CF, un todoterreno con un potente sistema hidráulico

Esquema

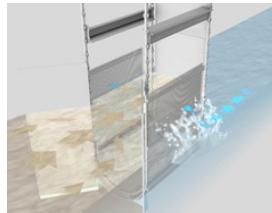

Media

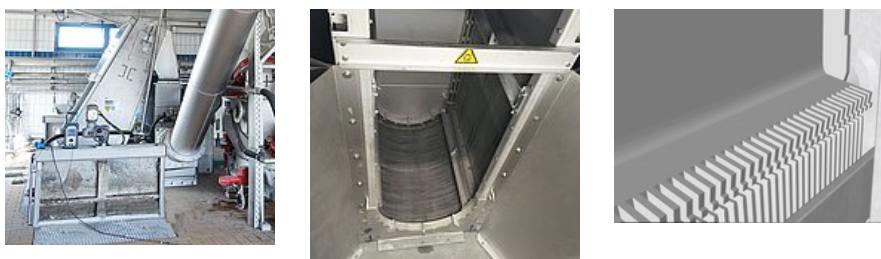

Animation: HUBER Multi-Rake Bar Screen RakeMax® CF

<https://www.youtube.com/watch?v=zcSwGcZdhak>

Más productos de este grupo: Tamices de chapa perforada y rejas

- [HUBER Tamiz de banda Escamax®](#)
- [HUBER Reja de gruesos RakeMax®](#)
- [HUBER Reja de gruesos RakeMax® HF \(High Flow\)](#)
- [HUBER Band Screen CenterMax®](#)
- [HUBER Reja de gruesos TrashMax®](#)
- [HUBER Rejillas automatica de cable TrashLift](#)

HUBER Technology España, S.L.U.
C/ Pollensa, 2 - EDIFICIO ARTEMISA
PL. Baja – Oficina 5
E-28290 LAS ROZAS DE MADRID (Madrid)

Tel: +34 91 630 49 94
Fax: +34 91 630 49 91

E-Mail: info@huber.es
Internet: www.huber.es

Registro Mercantil de Madrid,Tomo 16.432
Libro 0, Folio 93, Sección 8, Hoja M-279488
CIF: B-82916503